

Aluminum Plate

Make It Easy to
move.




New Concept Make Hard work Easy

Unscrew
to
move



3500/4500PM
Turn ± 12 Degree

6000/6025PM
Turn ± 18 Degree

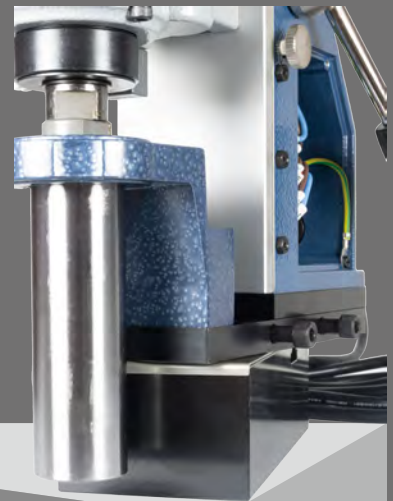

10mm

Move Forward

 **CAUTION**

For your own safety,
better to screw both
screws tightly before
drilling.

BECOME FLEXIBLE

WS-3500PM



Highest 490mm
Lowest 390mm

WS-4500PM



Highest 560mm
Lowest 450mm

Machine Specitication

Voltage (Single Phase)	100~120V AC 50/60HZ	220~240V AC 50/60HZ
Motor Rated Ampere	10A	5A
Motor Rated Power Consumption	1000W	
No-load Speed	780 RPM	
Tool Adaptor Inner Diameter	19.05mm	
Adjustable in height for Max. Stroke	100mm	
Coolant Supply	via tool Holder	
Magnet Power Consumption	38W	
Magnet Adhesion	15680N/KGF	
Magnet Dimensions	188mm x 86mm x 56mm	
Weight	14KG	
Hole-Cutting Capacity		
Annular Cutter	Out Diameter	Plate Thickness
	13-35mm	9-50mm
Twist Drill	1-13mm	

Machine Specitication

Voltage (Single Phrase)	100~120V AC 50/60HZ	220~240V AC 50/60HZ
Motor Rated Ampere	15A	7.5A
Motor Rated Power Consumption	1850W	
No-load Speed	650~720RPM	
Tool Adaptor Inner Diameter	19.05mm	
Adjustable in height for Max. Stroke	100mm	
Coolant Supply	via tool Holder	
Magnet Power Consumption	38W	
Magnet Adhesion	15680N/1600KGF	
Magnet Dimensions	188 x 86mm x 56mm	
Weight	15KG	
Hole-Cutting Capacity		
Annular Cutter	Out Diameter	Plate Thickness
	18-45mm	9-50mm
Drill Chunch & Twist Drill	Maximum Outer Diameter 13mm	
Special Adaptor & Twist Drill	6-12mm	

WS-6000PM



Machine Specification

Voltage (Single Phrase)	100~120V AC 50/60HZ	220~240V AC 50/60HZ
Motor Rated Ampere	20A	10A
Motor Rated Power Consumption	2050W	
No-load Speed	High Speed 750rpm	Dia. 13(1/2")~35mm(1-3/8")
	Low Speed 450rpm	Dia. 36(1-7/16")~60mm(2-3/8")
Tool Adaptor Inner Diameter	19.05mm	
Adjustable in height for Max. Stroke	135mm	
Coolant Supply	via tool Holder	
Magnet Power Consumption	85W	
Magnet Adhesion	22540N/2300KGF	
Magnet Dimensions	210MM X 100MM X 64MM	
Weight	23KG	
Hole-Cutting Capacity		
Annular Cutter	Out Diameter	Plate Thickness
	18-60mm	6-75mm
Twist Drill	1-13mm	

WS-6025PMT



Machine Specification

Voltage (Single Phrase)	100~120V AC 50/60HZ	220~240V AC 50/60HZ
Motor Rated Ampere	20A	10A
Motor Rated Power Consumption	2050W	
No-load Speed	High Speed 730rpm <small>Dia. 13(1/2")~35mm(1-3/8")</small>	
	Low Speed 400rpm <small>Dia. 36(1-7/16")~60mm(2-3/8")</small>	
Tool Adaptor Inner Diameter	19.05mm	
Adjustable in height for Max. Stroke	150mm(without	
Coolant Supply	via tool Holder	
Magnet Power Consumption	85W	
Magnet Adhesion	22540N/2300KGF	
Magnet Dimensions	210MM X 100MM X 64MM	
Weight	26KG	
Hole-Cutting Capacity		
MT3 (Morse Taper) with annular cutter holder	Out Diameter	Plate Thickness
	18-60mm	6-50mm
MT3 (Morse Taper) with drill cutter holder	Jacobs Taper	Drill Chuck Max. Diameter
	JT6	16mm
Twist Drill	Max. Dia. 25mm	
Noss Straight Shank Twist Drill	Shank 1/2", Max. Outer Dia. 16mm	